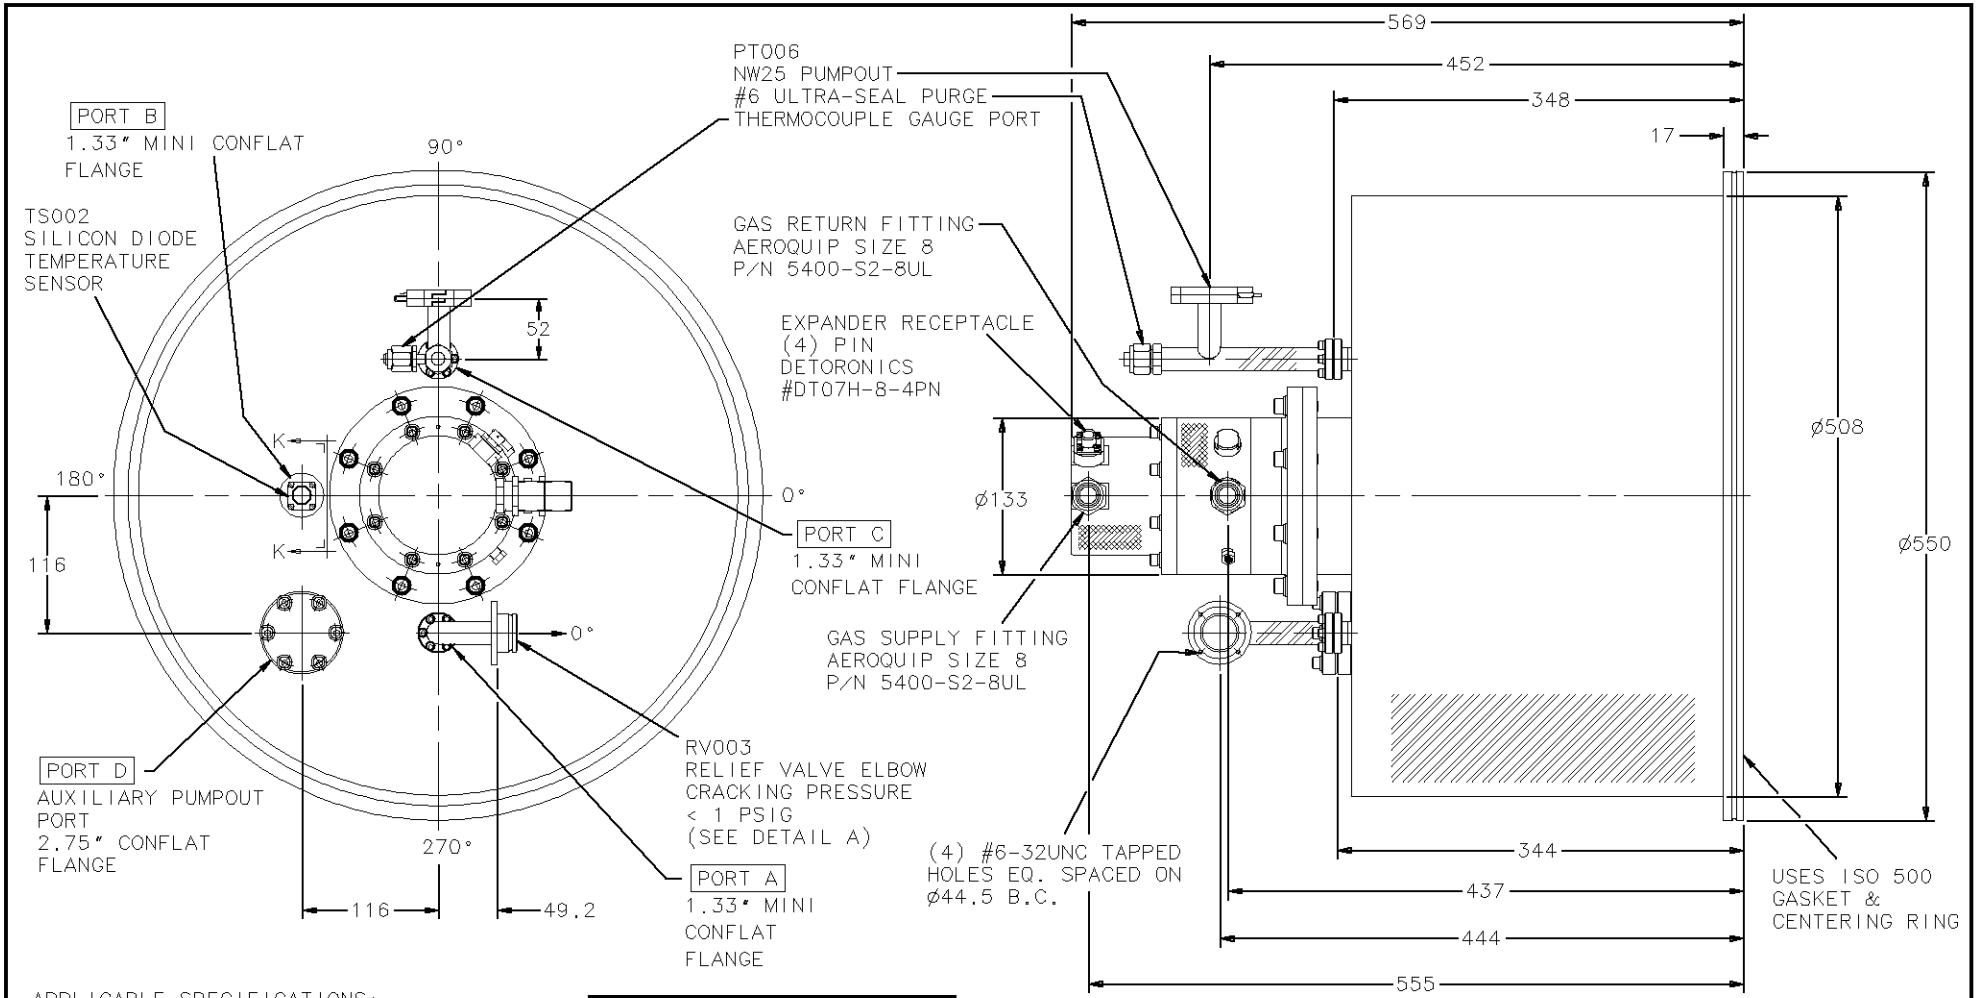

APPLICABLE SPECIFICATIONS:
GENERAL PRODUCT SPECIFICATIONS - TBD
CONFIGURATION SPECIFICATION - 265120A200
SALES WORKSHEET - CP-20 1001

SHOWN WITH MOST COMMON ACCESSORIES
REFER TO SALES WORKSHEET FOR OPTIONAL ACCESSORIES.



RELIEF VALVE DETAIL A
KEEP THIS 33mm DIA. X 40mm LONG REGION FREE OF OBSTRUCTION THAT WOULD RESTRICT THE OPERATION OF THE RELIEF VALVE POPPET.



VIEW K-K

MATERIAL LEGEND	
DESIGNATION	MATERIAL
	ST.STL.
	ALUMINUM
	COPPER,OFHC

DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS OTHERWISE SPECIFIED.

PROJECT: cryopumps_cp20

A	4654	08 SEP 08	JPK	YB	RGS	ERS
REV.	CRSP NO.	09 JUL 08	JPK	YB	RGS	ERS
		DATE	BY	MFG.	QUAL.	ENGR.

TITLE

OUTLINE DRAWING
CP-20 CRYOPUMP ASSEMBLY
50/60 HZ
ISO 500

Sumitomo
(SHI) CRYOGENICS OF AMERICA, INC.

NO. 265120A200I00-C
SHEET 1 OF 1

PROPRIETARY NOTICE: THIS DOCUMENT IS THE PROPERTY OF SUMITOMO (SHI) CRYOGENICS OF AMERICA, INC., AND SHALL NOT, WITHOUT THE EXPRESS WRITTEN PERMISSION OF SCAI, BE REPRODUCED OR COPIED IN WHOLE OR IN PART BY ANY PERSON OUTSIDE OF SCAI OR, IF LOANED BY SCAI TO SUCH PERSON, SHALL NOT BE USED FOR FURNISHING INFORMATION TO ANY THIRD PARTY OR FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS LOANED.